


Wiring Diagram Top view

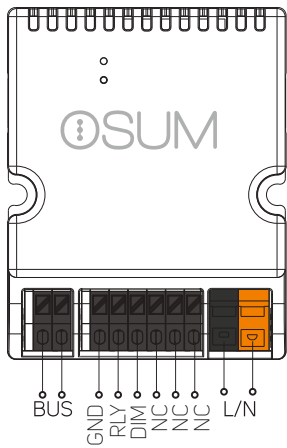

0-10 VOLTS DIMMING CONTROLLER

(OS-BE-010V)

Technical Specification :

| Parameter | Type | Remarks |
|----------------|---------------------------|--|
| Power | AC Input | Universal Range 90-264VAC, 47-63 Hz/ 15mA(Max) |
| | Maximum Control Capacity | 10 mA max on driver load only |
| | Idle Power Consumption | Less than 0.2W(Average) |
| Control Inputs | Control and Configuration | SL-Bus |
| | | WiFi for advanced control & configuration |
| | | Operable via OSUMONE App |
| Environmental | Operating Temperature | -10°C...+70°C |
| | Humidity | 95% RH y, non-condensing |
| | Usage | Indoor/Dry location use only |
| Mechanical | Dimension/Weight | 42(W) x 42(H) x 50(D) (in mm)/ 120gm |
| | Connector Type | Screwless Type, COLOR Coded |
| | Connector Contacts | LIVE, NEUTRAL,SL-Bus, +, Dim ,Rly,Gnd |
| Safety | Approvals | ISI, CE (in progress) |

*All specifications, product casings are valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated and subject to change without prior notice.