


Wiring Diagram Top view

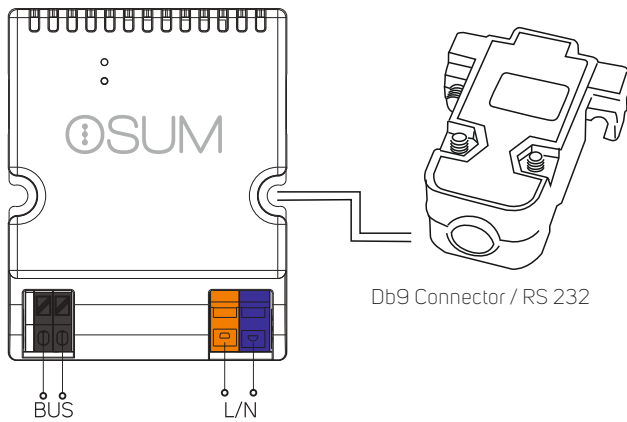

HVAC/BACNET COUPLER

(OS-BE-VRV)

Technical Specification :

Parameter	Type	Remarks
Power	AC Input	Universal Range 90-264VAC, 47-63 Hz
	Maximum Control Capacity	One load Cool Master over bacnet/Rs232
	Idle Power Consumption	Less than 0.2W(Average)
Control Inputs	Control and Configuration	SL-Bus
		WiFi for advanced control & configuration
		Operable via OSUMONE App
Environmental	Operating Temperature	-10°C...+70°C
	Humidity	95% RH y, non-condensing
	Usage	Indoor/Dry location use only
Mechanical	Mounting/Fittings	Snap fit type/ front side insertion into support frame
	Dimension/Weight	42(W) x 42(H) x 50(D) (in mm)/ 120gm
	Connector Type	Screwless Type, COLOR Coded
	Connector Contacts	LIVE, NEUTRAL, SL-Bus,9 pin Din male
Safety	Approvals	ISI, CE (in progress)

*All specifications, product casings are valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated and subject to change without prior notice.