

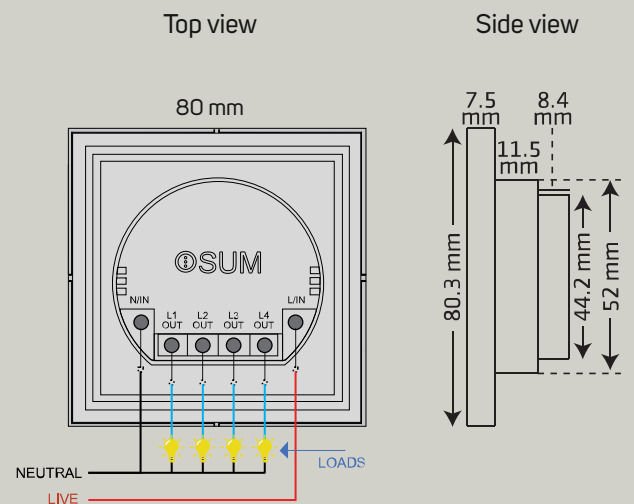


LUXE SCENE CONTROLLER

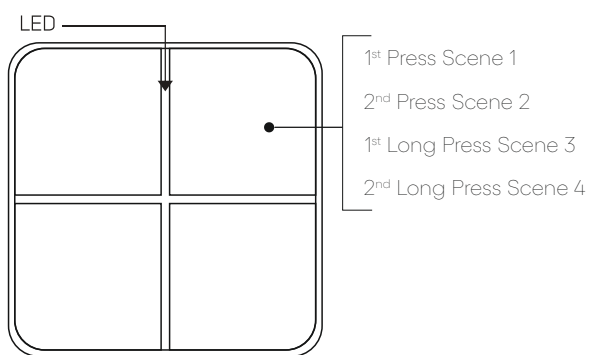

Specifications Front view

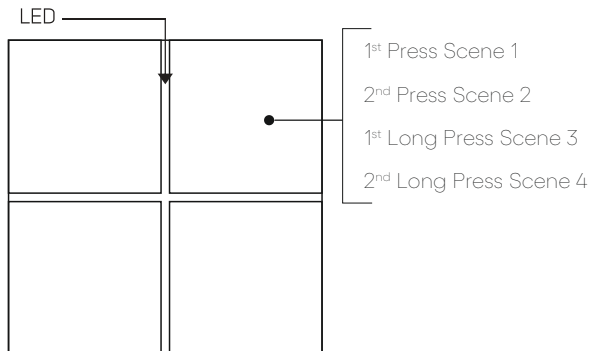

Technical Specification :

Parameter	Type	Remarks
Power	AC Input	Dc 12-24 Volts 500mA
	Operation type	Dry contact IO terminal driving LV input trigger
	Idle Power Consumption	Less than 0.5W(Average)
Control Inputs	Local Buttons/Channel	Channel-1,2,3,4 short and long press touch
	Control and Configuration	WiFi for advanced control & configuration Configurable and operable via OSUMONE App with Osum smart SCN CTL
Environmental	Operating Temperature	-10°C...+70°C
	Humidity	95% RH y, non-condensing
	Usage	Indoor/Dry location use only
Mechanical	Mounting/Fittings	Snap fit type/ front side insertion into support frame via screws
	Dimension/Weight	80(W) x 80(H) x 35(D) (in mm)/ 180gm
	Connector Type	Wago press Type
	Connector Contacts	+24, GND, COM, IO1,IO2,IO3,IO4
Safety	Approvals	CE

*All specifications, product casings are valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated and subject to change without prior notice.